

SEC-3511R-EY4

2 MP Fixed Network Bullet Camera



RELEVANT FEATURES AND FUNCTIONS

- 1/2.8" Progressive Scan CMOS Sensor
- 2 Megapixel resolution
- 4 mm lens
- 120 dB WDR
- Outdoor (IP67)
- Up to 30 m



SEC-3511R-EY4

CAMERA

Sensor	1/2.8" Progressive Scan CMOS
Min. illumination	0.01Lux @ (F1.2, AGC ON) , 0.028Lux @ (F2.0, AGC ON)
Lens	4mm @F2.0
Angle of view	Horizontal field of view: 86° Vertical FOV: 46° Diagonal FOV: 102°
Lens mount	M12
Shutter time	1/3 s ~ 1/100,000 s
Slow shutter	Yes
Day/Night	IR cut filter with auto switch
Wide Dynamic Range	120 dB WDR
Image usability	3D DNR/BLC
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
IR range	30 m

VIDEO

Max. resolution	1920 × 1080
Frame rate	Main stream: 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) Sub stream: 50Hz: 25fps (640 × 480, 640 × 360, 320 × 240) 60Hz: 30fps (640 × 480, 640 × 360, 320 × 240)
Video compression	H.265 Ultra / H.265 / H.264 Ultra / H.264 / MJPEG
Video bit rate	32 Kbps - 8 Mbps
Video Streaming	Dual stream
Image settings	Rotate mode, Saturation, Brightness, Contrast and Sharpness adjustable by client software or web browser
Region of Interest	Support 1 fixed region for main stream
Smart features	Line crossing detection, intrusion detection

AUDIO/ALARM

Alarm trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD error, HDD full
---------------	--

NETWORK

Local storage	Built-in Micro SD / SDHC / SDXC card slot, up to 128 GB
Network storage	NAS (Support NFS, SMB/CIFS)
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, QoS, IPv6, UDP, Bonjour
Communication interface	1 RJ45 10 M / 100 M self-adaptive Ethernet port
Simultaneous live view	Up to 6 channels
Users	Up to 32 users 3 levels: Administrator, Operator and User
Security	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark
Compliance	ONVIF (PROFILE S, PROFILE G), ISAPI


GENERAL

Power supply	12 V DC ± 25% PoE (802.3af class 3)
Power consumption	12 V DC, 0.3 A, max. 4 W PoE (802.3af, 36 to 57 V), 0.2 A to 0.1 A, max. 5.5 W
Operating conditions	-30 °C to 60 °C (-22 °F to 140 °F) Humidity: 95% or less (non-condensing)
Protection level	IP67
Material	Front Cover: Plastic Back cover: Metal
Dimensions	69.7 mm × 67.9 mm × 171.4 mm (2.7" × 2.7" × 6.7")
Weight	350 g (0.8 lb)

ORDERING INFORMATION

- SEC-3511R-EY4

DIMENSIONS

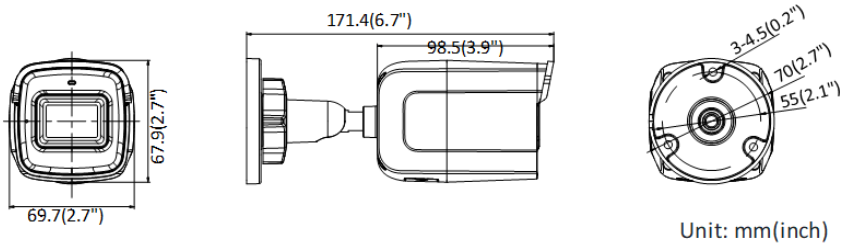

ACCESSORIES



SES-1280XS
Junction box